

CHC1554


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

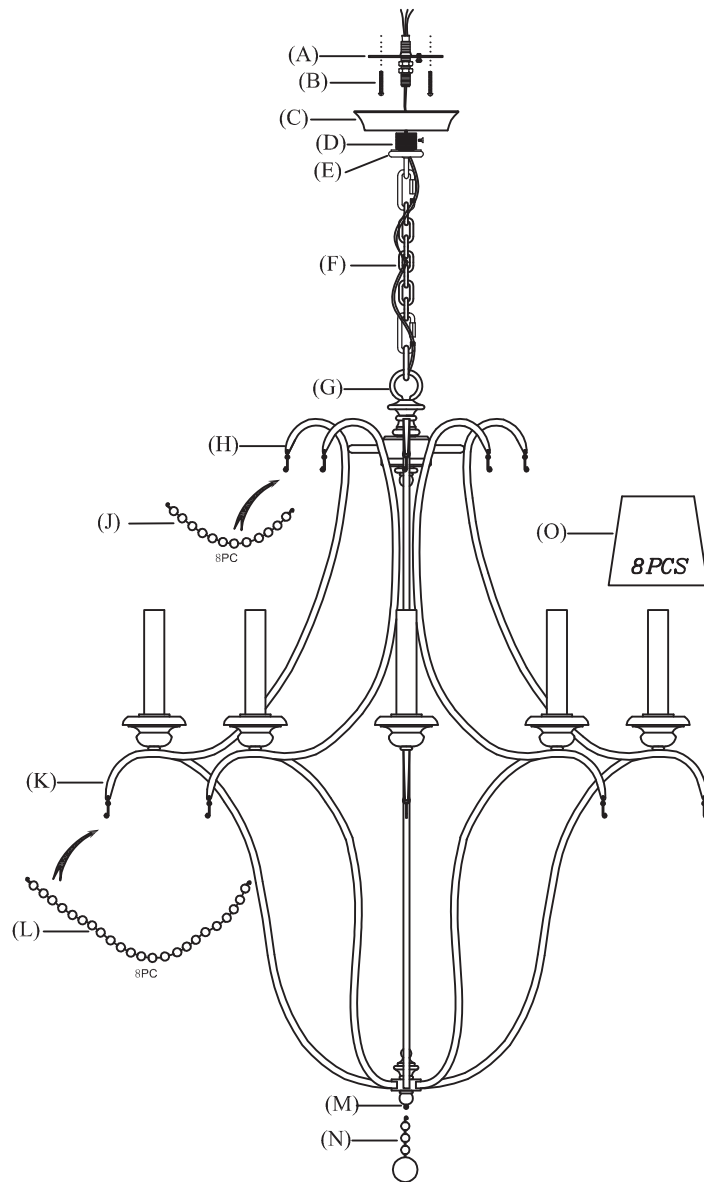

1. Attach chain (F) to top loop (G) on assembly base by opening/closing end link of chain.
2. Feed wire through chain (F) and mounting loop (D).
3. Unscrewing the canopy ring (E), slide canopy ring (E) and canopy (C) on chain.
4. Attach mounting strap (A) to mounting outlet box with mounting screws (B).
5. Insert thread nipple in mounting strap (A) and thread one of hex nut onto the nipple using pliers until snug.
6. Attach chain mounting loop (D) to thread nipple and tighten the set screw. Thread another hex nut onto the nipple until tight.
7. Attach chain (F) with fixture to chain mounting loop (D) by opening/closing end link of chain at desired height.
8. Attach the bare copper ground wire from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect the neutral wire from the fixture (ribbed molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
10. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Slip canopy (C) to ceiling and secure with the canopy ring (E).
12. Hook the pearl chains to the adjacent lamp branch. NOTE: the short pearl chains (J) hook to the upper lamp branches (H) and the long pearl chains (L) hook to the lower lamp branches (K)
13. Hook the finial (N) to circle (M) on the assembly base.
14. Insert light bulbs into the sockets.
15. Clip lamp shades (O) onto the bulbs.